



FBAC 603

Standalone IP based Fingerprint Access Control

SR 100

Fingerprint Exit Sensor

Technical Specification

Users: 1500 Fingerprints

Transaction: 50,000 Logs

CPU: 32bit Microprocessor

Sensor: 500 dpi Optical Sensor

Identification speed: <=2 Sec

FAR: <=0.0001%

FRR: <=1%

Card Reader: Inbuilt Prox card reader

Dimension: 140 mm * 117 mm * 38 mm

Access control: 50 time zones, 5 group, 10 time combination

Communication: RS232, RS485, TCP/IP, Wiegand I/O (26 bit)


USB 2.0 Port

Operation temperature: 0°C - 45°C

Operation Humidity: 20-80%

Power: 12V DC, 400mA

Optional Functions: Web server, work code, Antipass, Mifare/HID card reader

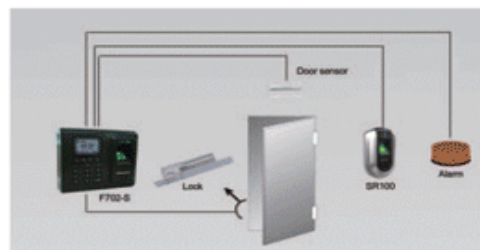

SR 100

Dimension: 129 mm * 70 mm * 35 mm

Communication: RS232, USB with Wiegand output

Operation temperature: 0°C - 45°C

Operation Humidity: 20-80%

Optional Functions: Antipass, Prox/Mifare/HID card reader